


Starrett®

PROMO 2016.1

PRECISION HAND TOOL PROMOTION

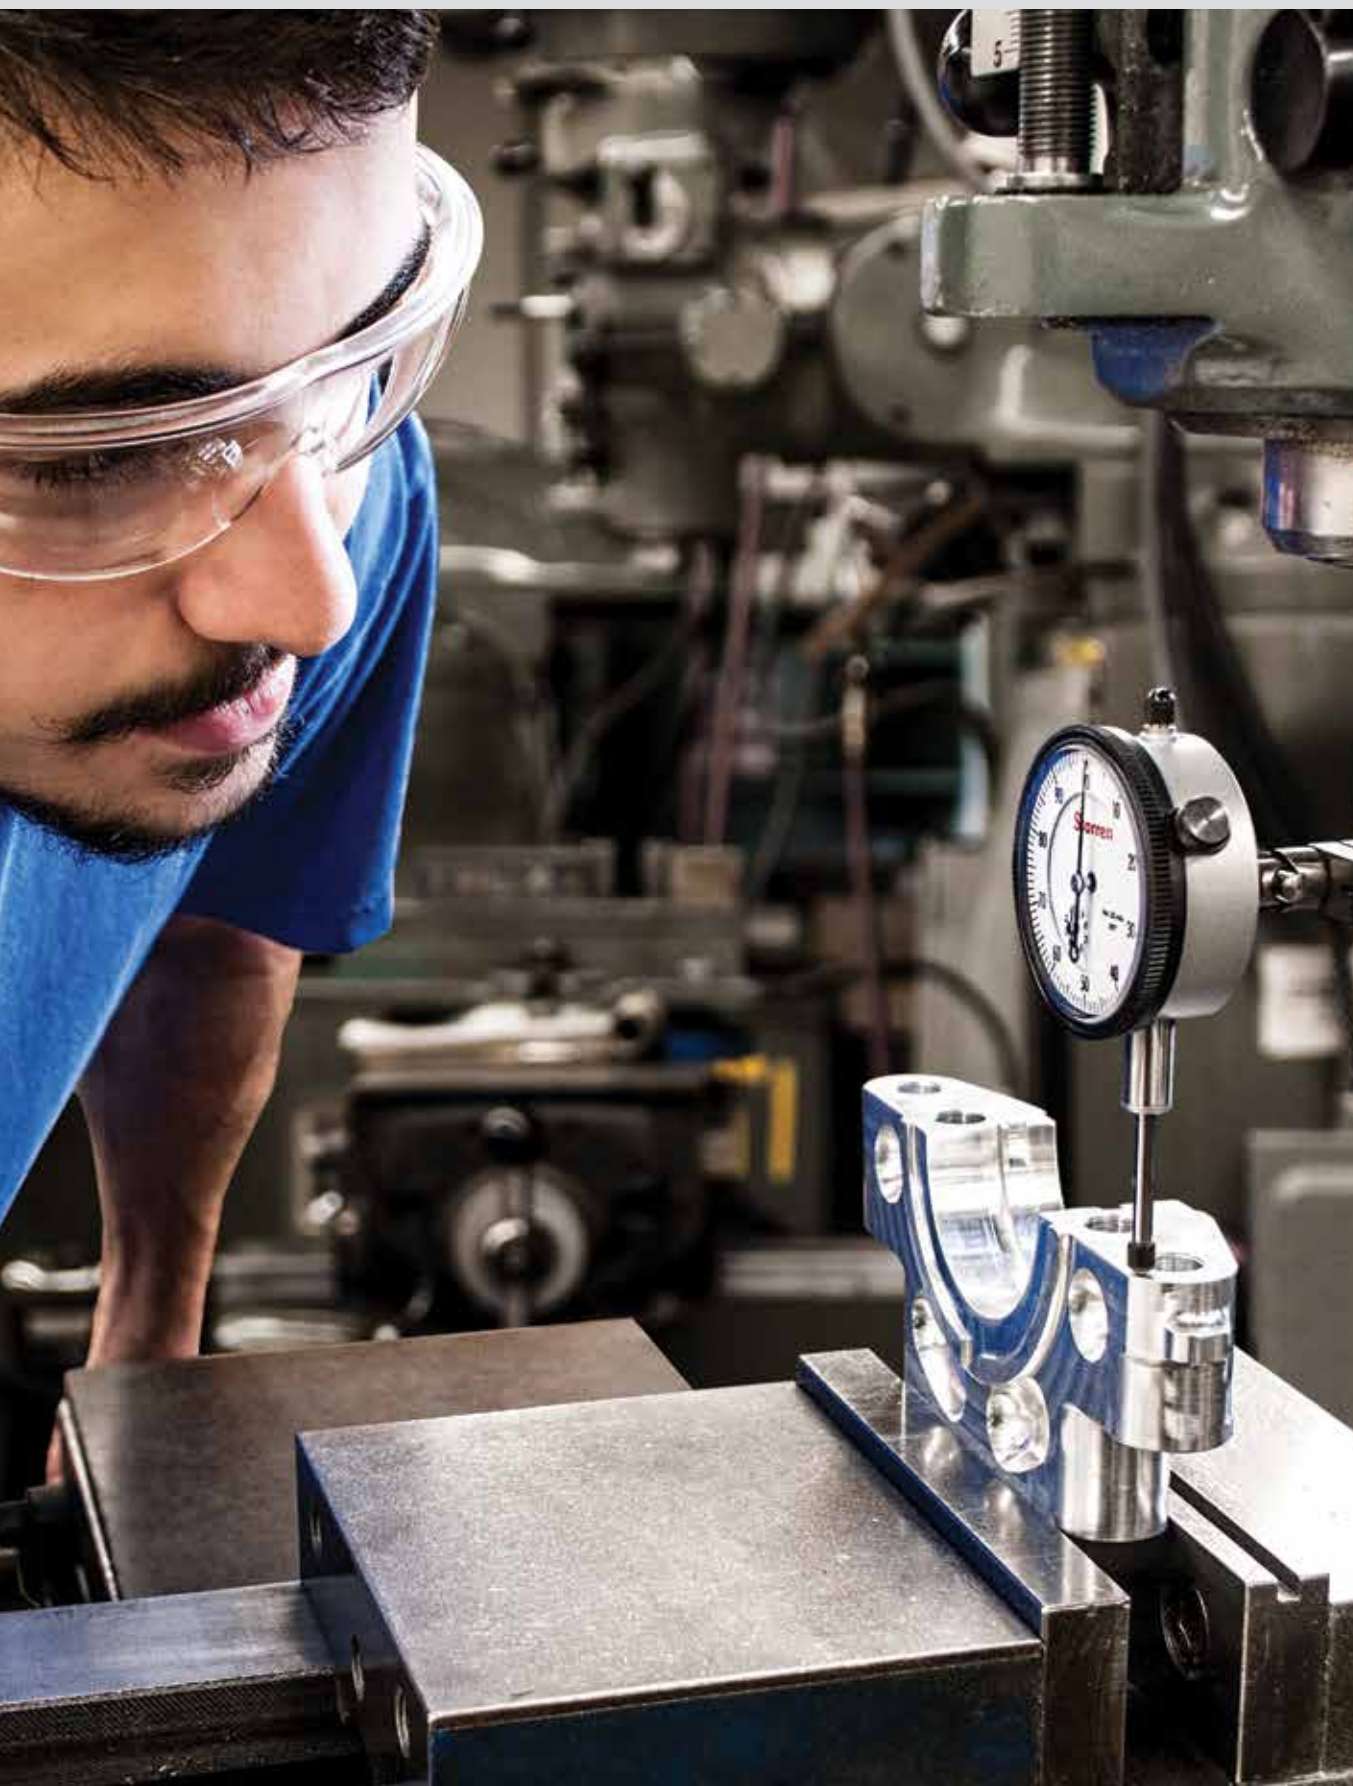

METROLOGY SOLUTIONS

210 SCREW THREAD COMPARATOR MICROMETER

- 60° conical anvil, spindle faces with 1/64" (0.4mm) flats on the ends of the points
- Extremely hard and stable one-piece spindle
- Advanced sleeve design with staggered lines and distinct figures for precise, easy readability
- Balanced frame design for comfortable, accurate measuring



210AP

Cat. No.	EDP	Range	Grad.	Accuracy	Sale Price
210AP	50731	0-7/8	0.001	±.002"	162.45

220 MUL-T-ANVIL MICROMETERS

- Handles a wide variety of measurements impossible to obtain with regular micrometers
- Rigid one-piece frame of drop forged steel
- Extremely hard and stable one-piece spindle
- Micro-lapped measuring faces



220XFL-1

Cat. No.	EDP	Range	Grad.	Accuracy	Sale Price
220XFL-1	50746	0-1"	.001"	±.0002"	260.30
220XFL-2	66433	1-2"	.001"	±.0002"	300.20

224 INTERCHANGEABLE ANVIL MICROMETERS

- Suitable wrenches are furnished to make necessary adjustments
- Combination ratchet and speeder for uniform pressure and quicker adjustment
- Advanced sleeve design with staggered lines and distinct figures for precise and easy readability



224AARLZ

Cat. No.	EDP	Range	Grads.	Standards*	Sale Price
224AARLZ	50770	0-4"	.001"	1", 2", 3"	437.95
224ARLZ	50772	2-6"	.001"	2", 3", 4", 5"	481.65
224.1BRLZ	72700	6-9"	.001"	6", 7", 8"	639.35
224.1CRLZ	72701	9-12"	.001"	9", 10", 11"	723.90
224.1DRLZ	72702	12-16"	.001"	12", 13", 14", 15"	897.75
224.1ERLZ	72703	16-20"	.001"	16", 17", 18", 19"	1,113.40

*Standards included

T230 OUTSIDE MICROMETER

- Extremely hard and stable one-piece spindle
- Advanced sleeve design with staggered lines and distinct figures for precise and easy readability
- Balanced frame and thimble design ensure easy handling and better readability
- Gracefully designed tapered frame for use in narrow slots and tight places



T230XRL

Cat. No.	EDP	Range	Resolution	Sale Price
T230XRL	50944	0-1"	.0001"	210.90

260Z GROOVE MICROMETER

- Advanced sleeve design with staggered lines and distinct figures for precise and easy readability
- Quick-reading figures - every thousandth number on inch tools
- Balanced design to ensure easy handling and better readability
- Quick and easy adjustment



260Z

Cat. No.	EDP	Range (widths)		Grad.	Accuracy	Sale Price
		Grooved	Land			
260Z	67987	.050"-1.050"	0-1.000"	.001"	±.0004"	320.15

263 MICROMETER HEADS

- Furnished with 1/2" (12.7mm) diameter surface
- No glare satin chrome finish
- Reading surfaces: satin-finish
- Graduations: .001" (0.01mm)
- Models with lock nut (L), plain thimble (P), or ratchet (R)



263P

Cat. No.	EDP	Range	Sale Price
263P	51251	0-1"	85.50
263P-38	67108	0-1"	85.50
263L	51253	0-1"	91.20
263RL	51254	0-1"	95.00
263MP*	51275	0-25mm	85.50
263MRL*	51257	0-25mm	95.00

* 0-25mm models specify clamping diameter 12 or 12.7mm sent unless otherwise ordered.

436 OUTSIDE MICROMETERS

- The most popular micrometers used by skilled professionals worldwide
- Accurate, rugged, and easy to use
- Starrett satin chrome finish - no glare - resists rust
- Staggered lines and distinct figures for precise and easy readability
- Balanced frame and thimble design ensure easy handling
- Tapered frame for use in narrow slots and tight places
- Quick and easy adjustment
- Micro-lapped measuring faces
- Extremely hard and stable one-piece spindle



436.1RL-1

Cat. No.	EDP	Range	Grads.	Sale Price
436.1RL-1	67993	0-1"	.001"	127.30
436.1RL-2	68002	1-2"	.001"	152.00
436.1RL-3	68010	2-3"	.001"	190.00
436.1RL-4	68017	3-4"	.001"	209.00
436.1RL-8	72711	7-8"	.001"	303.05
436.1RL-9	72712	8-9"	.001"	320.15
436.1RL-10	72713	9-10"	.001"	335.35
436.1RL-11	72714	10-11"	.001"	350.55
436.1RL-12	72715	11-12"	.001"	368.60
T436.1XFL-1	67999	0-1"	.001"	130.15
T436.1XFL-2	68007	1-2"	.0001"	158.65
T436.1XFL-3	68015	2-3"	.0001"	196.65
T436.1XFL-4	68021	3-4"	.0001"	213.75
T436.1XFL-5	68027	4-5"	.0001"	231.80
T436.1XFL-6	68033	5-6"	.0001"	252.70
S436.1AXRLZ	68036	0-3"	.001"	549.10
S436.1BXRLZ	68040	0-4"	.001"	798.00
S436.1CXRLZ	68044	0-6"	.001"	1,345.20

440 DEPTH MICROMETERS

- The depths of holes, slots, shoulders and projections can be measured with these fine tools
- 2-1/2" (63.5mm) base and 1/8" (3.2mm) diameter measuring rods
- Combination ratchet and speeder (R) for uniform pressure and quicker adjustment
- Ring-type knurled lock nut (L) for quick and sure locking



440Z-3L

Cat. No.	EDP	Range	Function	Sale Price
440Z-3L	52113	0-3"	Speeder	236.55
440Z-6L	52117	0-6"	Speeder	282.15
440Z-9L	52121	0-9"	Speeder	357.20
440Z-3RL	52115	0-3"	Ratchet/Speeder	241.30
440Z-6RL	52119	0-6"	Ratchet/Speeder	288.80
440Z-9RL	52123	0-9"	Ratchet/Speeder	361.95

T444 OUTSIDE MICROMETERS

NEW!

- No-glare satin chrome finish, which resists rust
- Advanced sleeve design with staggered lines and distinct figures for precise and easy readability
- Balanced frame and thimble design to ensure easy handling and better readability
- Insulated frame for prevention of temperature related expansion and contraction
- Provides quick and easy adjustment
- Reading in ten-thousandths of an inch (.0001") with vernier scale on the sleeve



T444.1XRL-1

Cat. No.	EDP	Range	Grads.	Sale Price
T444.1XRL-1	52083	0-1"	.0001"	98.80
T444.1XRL-2	52084	1-2"	.0001"	115.90
T444.1XRL-3	52085	2-3"	.0001"	128.25
T444.1XRL-4	52086	3-4"	.0001"	148.20
T444.1XRL-5	52087	4-5"	.0001"	160.55
T444.1XRL-6	52088	5-6"	.0001"	178.60

486 BLADE TYPE MICROMETERS

- The blades are .030" (0.8mm) thick
- Blades will measure to 5/16" (8mm) depths
- Balanced frame and thimble design ensure easy handling and better readability
- Speeder for quicker adjustment on all sizes



486P-1

Cat. No.	EDP	Range	Sale Price
486P-1	52499	0-1"	397.10
486P-2	52501	1-2"	410.40
486P-3	52503	2-3"	420.85
486P-4	52505	3-4"	444.60
486P-5	52507	4-5"	460.75
486P-6	52509	5-6"	547.20
486P-7	67094	6-7"	719.15
486P-8	67095	7-8"	724.85
486P-9	67096	8-9"	739.10
486P-10	67097	9-10"	749.55
486P-11	67098	10-11"	754.30
486P-12	67099	11-12"	849.30

700 INSIDE MICROMETER CALIPERS

- Satin chrome reading surface is glare free and resists rust
- Smooth friction thimble for consistent readings
- Lock screw

**700A**

Cat. No.	EDP	Range	Sale Price
700A	52909	.200-1.200"	355.30
700B	52911	1-2"	380.95

796.1 ELECTRONIC OUTSIDE MICROMETERS

- IP67 protection against coolants, water, chips, dust and dirt often found in machine shop environments
- Balanced frame for comfortable and accurate measuring
- No-glare satin chrome finish on thimble and sleeve minimizes annoying surface glare under bright lights indoors or filters UV light
- Large, easy-to-read, high contrast LCD digital readout
- Spindle lock
- Micro-lapped carbide measuring faces

**796.1XFL-1**

Cat. No.	EDP	Range	Resolution	Accuracy	Sale Price
796.1XFL-1	01104	0-1"	.00005"	±.0001"	180.50
796.1XFL-2	01105	0-2"	.00005"	±.0001"	240.35
796.1XRL-1	01116	0-1"	.00005"	±.0001"	180.50
796.1XRL-2	01117	1-2"	.00005"	±.0001"	240.35

795.1 ELECTRONIC MICROMETERS**With Output**

- IP67 protection against coolants, water, chips, dust and dirt often found in machine shop environments
- Balanced frame for comfortable and accurate measuring
- No-glare satin chrome finish on thimble and sleeve minimizes annoying surface glare under bright lights indoors or filters out UV light
- Large, easy-to-read, high-contrast LCD digital readout
- Spindle lock
- Micro-lapped carbide measuring faces
- SPC output capability

**795.1XFL-1**

Cat. No.	EDP	Range	Resolution	Accuracy	Sale Price
795.1XFL-1	01100	0-1"	.00005"	±.0001"	243.20
795.1XFL-2	01101	1-2"	.00005"	±.0001"	279.30
795.1XRL-1	01108	0-1"	.00005"	±.0001"	243.20
795.1XRL-2	01109	1-2"	.00005"	±.0001"	279.30

3732 ELECTRONIC MICROMETERS**Without Output**

- Balanced frame design for comfortable and accurate measuring
- Large, easy-to-read, high-contrast LCD digital readout
- No-glare black wrinkle finish on frame
- Hard and stable one-piece friction thimble permits one-hand operation of micrometer and uniform contact pressure

**3732XFL-1**

Cat. No.	EDP	Range	Resolution	Accuracy	Sale Price
3732XFL-1	12268	0-1"	0.00005"	± 0.0001"	133.00
3732XFL-2	12269	1-2"	0.00005"	± 0.0001"	180.50
3732XFL-3	12270	2-3"	0.00005"	± 0.0001"	229.90
3732XFL-4	12271	3-4"	0.00005"	± 0.00015"	256.50

3206 OUTSIDE MICROMETER STAND

- Converts outside micrometers to a sturdy bench gage for batch inspection of small parts
- Useful as a handy bench vise or assembly fixture
- Secure gripping surfaces
- Ball joint construction allows head to be positioned as much as 30° off perpendicular in any direction
- Positive lock on the base
- Base Dimensions: 6-3/8" long x 3-1/2" wide x 3/4" thick (162mm long x 89mm wide x 19mm thick)
- Tilting head clamping: 3/4" thick x 1" throat depth (19mm thick x 25mm throat depth)
- Accommodates all Starrett 1/2" (13mm) and 1" (25mm) outside micrometers, 2 and 2A 2" Outside Micrometers and 210, 220, 483, 485, 569 Special Purpose Outside Micrometers

Cat. No.	EDP	Description	Sale Price
3206	68917	Outside micrometer stand	101.65

**3206**

430 INDICATING MICROMETER

- Retractable, quick release anvil for uniform, consistent, and fast measurement
- Insulated frame to prevent thermal expansion/contraction
- Balanced frame and thimble design for ease of use
- Carbide measuring finish on anvils
- Friction thimble
- Satin chrome finish for rust and glare resistance
- Spindle lock
- Supplied with custom wooden case



430XLZ-1

Cat. No.	EDP	Range Mic.	Indic. Mic.	Resolution Mic.	Indic. Mic.	Sale Price
430XLZ-1	72533	0-1"	±.0020"	.0001"	.00005"	759.05

798 ELECTRONIC CALIPERS



- IP67 level of protection against, coolant, dirt and dust
- With and without output
- Fine adjustment
- Hardened stainless steel measuring surfaces
- Large, easy-to-read, high contrast LCD digital readout



798A-6/150

Cat. No.	EDP	Range	Resolution	Output	Sale Price
798A-6/150	20798	6"	.0005"		200.45
798A-8/200	20799	8"	.0005"		255.55
798A-12/300	20800	12"	.0005"		380.00
798B-6/150	12521	6"	.0005"	x	240.35
798B-8/200	12523	8"	.0005"	x	291.65
798B-12/300	12525	12"	.0005"	x	433.20
798BX-6/150	12782	0-6"	.0005"	x	338.20

EC799 ELECTRONIC CALIPERS

NEW!

- Lightweight, ergonomic design
- Inch/millimeter conversion reads .0005" or 0.01mm
- Easy access to the single, long-life battery
- Last measuring position retained when shut off
- Hardened stainless steel body for long life
- Find adjustment thumb wheel
- Lock screw to hold the slide in position
- Resolution: .0005" (0.01mm)
- Zero at any position




EC799A-6/150

Cat. No.	EDP	Range	Output	Sale Price
EC799A-6/150	00142	0-6"		148.20
EC799A-8/200	00145	0-8"		209.00
EC799A-12/300	00148	0-12"		312.55
EC799B-6/150	00143	0-6"	x	190.95
EC799B-8/200	00146	0-8"	x	252.70
EC799B-12/300	00149	0-12"	x	357.72

3202 SLIDE CALIPERS

NEW!

- Provide quick accurate measurement of O.D. and depth
- Sharp, clear dial graduations
- Sharp, black graduations on satin finished bar
- Hardened stainless steel
- Lock screws for sliding jaw and dial bezel

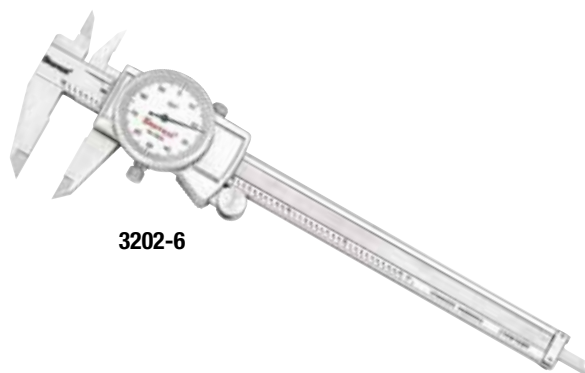

3202-6

Cat. No.	EDP	Range	Grads.	Sale Price
3202-6	61467	0-6"	.001"	95.95
3202-8	61468	0-8"	.001"	135.85
3202-12	61466	0-12"	.001"	197.60



643JZ DIAL DEPTH GAGE

- Hardened, ground needle point contact
- Knife-edge base which can be precisely positioned for close work
- Point is 1/2" (12.7mm) long with 40 degree included angle
- Case included
- 0-.125" range
- .0005" graduation
- 0-25-0 dial reading



643JZ

Cat. No.	EDP	Range	Resolution	Accuracy	Sale Price
643JZ	52714	0-12"	.0005"	±.001"	383.80

3753A ELECTRONIC DEPTH GAGES

Without Output



- Clear, easily-read number, properly sized for the tool
- Hardened stainless steel body and slide for long life
- Fine adjustment thumb roll for precision measurements
- Lock to hold slide in position



3753A-6/150

Cat. No.	EDP	Range	Resolution	Accuracy	Sale Price
3753A-6/150	12258	0-6"	.0005"	±.001"	275.50
3753A-8/200	12259	0-8"	.0005"	±.001"	287.85
3753A-12/300	12260	0-12"	.0005"	±.001"	348.65

3753B ELECTRONIC DEPTH GAGE

With Output

- Hardened stainless steel bar for long life
- Removable hook attachment for measurements from the edge of the slots, grooves, etc.
- Lock to hold the slide in position
- Fine adjustment thumb roll for precision measurements
- Large, easy-to-read LCD, .310" character height
- Induction type linear encoder system
- Patented non-contact RS-232 data output
- CR2032 3-volt battery (>year battery life under normal use)
- In/mm conversion
- Zero at any position



3753B-6/150

Cat. No.	EDP	Range	Description	Sale Price
3753B-6/150	12690	0-6"	Depth gage in case	343.90

647 DIAL COMPARATORS

NEW!

- Effective non-shock mechanism
- Pinions and shafts of the movement are jeweled
- After removal of the safety cap the adjustment screw on top of the case allows simple and safe zero setting of the instrument over the total measuring
- A safety cap prevents unintentional turning of the fine adjustment screws



647

Cat. No.	EDP	Range	Grads.	Reading	Sale Price
647	00001	.004"	.00005"	20-0-20	211.85
647M	00002	0.1mm	0.001mm	50-0-50	211.85

3809 DIAL TEST INDICATORS

- Three dovetail positioning mounts work with most existing test indicator accessories
- Precision gear-driven design with smooth, jeweled movement
- Contact point reverses automatically, always maintaining clockwise hand rotation
- Contacts are frictionally adjustable and replaceable



3809AC

Cat. No.	EDP	Range	Grads.	Reading	Sale Price
3809AC	12305	.030"	.0005"	0-15-0	136.80

3600 ELECTRONIC INDICATORS

- Long battery life
- Plastic storage case with clear cover
- Large, easy-to-read LCD
- Zero setting in any position
- Reverse travel (control indicates direction)
- Dust cap

**3600-5**

Cat. No.	EDP	Range		Resolution		Accuracy (±)		Sale Price
		in	mm	in	mm	in	mm	
3600-5	68813	0.5	12.7	.0005	0.01	0.001	0.03	164.35
3600M-5	68918	—	12.7	—	0.01	—	0.03	164.35

657A SWIVEL POST MAGNETIC BASE

- Three precision ground magnetic contact surfaces (plus V-step)
- Powerful, permanent magnetic base holds firmly to steel or iron surfaces - horizontally, vertically, upside-down
- The swivel post assembly on these holders provides universal adjustment in both horizontal and vertical planes



Cat. No.	EDP	Sale Price
657A	52744	174.80

657P MAGNETIC BASE

- 1-15/16" x 1-5/8" x 1-7/8" (50 x 40 x 48mm) deep
- Push button on/off switch for one-hand operation



Cat. No.	EDP	Sale Price
657P	52757	125.40

657 MAGNETIC BASE INDICATOR ASSEMBLIES

- Works with any indicator with a 3/8" (9.5mm) stem (such as our 25 and 650 and 651)
- Works with any indicator with a standard dovetail mount (such as our 3808, 3809, 3908, 3909 and 811)
- Works with any indicator with a 1/4" (6.3mm) shank (such as our 196)
- Works with any indicator with a 3/16" (4.7mm) shank (such as our 3808, 3809, 3908, 3909, 811 and 711)

**657-1**

Cat. No.	EDP	Description	Sale Price
657-1	64436	Universal indicator holder, 657W fine-adjustment, 657P magnetic base, PT17850 indicator holding rod and 657S snug	346.75
657-2	64437	Universal indicator holder with 657 magnetic base	279.30

657D TRADITIONAL MAGNETIC BASE

- Designed to hold lug and center back indicators
- Three precision ground magnetic contact surfaces (plus V-step)
- Powerful, permanent magnetic base hold firmly to steel or iron surfaces - horizontally, vertically, upside-down
- Includes magnetic base with attachments: swivel post snug and gage holding rod

**657D**

Cat. No.	EDP	Sale Price
657D	52749	214.70

657TW FLEX POST MAGNETIC BASE

- For use with all Starrett Test, AGD, Dial and Miniature Dial Indicators
- Accommodates similar indicators of other manufacturers
- Includes Flex-O-Post assembly
- Flexible post can be adjusted to any position and locked by turning a lever

**657TW**

Cat. No.	EDP	Sale Price
657TW	52761	302.10

NEW!

ELECTRONIC INDICATORS



**WATCH OUR INFORMATIONAL VIDEOS TO LEARN
MORE ABOUT OUR ELECTRONIC INDICATORS!**



2700 BACKLIGHT ELECTRONIC INDICATORS

Cat. No.	EDP	Range	SPC Output	Accuracy	Resolution	Sale Price
2700-800	72689	1"	x	(±) 2 Res.	.0001"	521.55
2700-801	72690	1"	x	(±) 2 Res.	.000050"	569.05
2700-802	72691	2"	x	(±) 2 Res.	.0005"	749.55
2700-803	72692	2"	x	(±) 2 Res.	.0001"	759.05
2700-804	72693	4"	x	(±) 2 Res.	.0005"	1,078.25
2700-805	72694	4"	x	(±) 2 Res.	.0001"	1,125.75

2900 ELECTRONIC INDICATORS

Cat. No.	EDP	Range	Resolution	Min./Max. Runout	Selectable Resolution	Sale Price
2900-1-2	72676	2"	.00005"			783.75
2900-1M-50	72680	50mm	.00005"			783.75
2900-1ME-50	72679	2" (50mm)	.00005"			788.50
2900-4-2	72677	2"	.0005"/.0001"/.00005"		x	835.05
2900-4M-50	72682	50mm	.0005"/.0001"/.00005"		x	835.05
2900-4ME-50	72681	2" (50mm)	.0005"/.0001"/.00005"		x	839.80
2900-6-2	72678	2"	.0005"/.0001"/.00005"	x	x	874.00
2900-6M-50	72684	50mm	.0005"/.0001"/.00005"	x	x	874.00
2900-6ME-50	72683	2" (50mm)	.0005"/.0001"/.00005"	x	x	878.75



659A HEAVY DUTY MAGNETIC BASE

- Has approximately twice the holding power of our 657 Magnetic Base and has a rotary on/off switch
- Post snug with two 3/4" (19mm) holes positions the dial indicator at any height, vertical angle and allows for 360 degree rotation of the gage rod
- Includes magnetic base, upright post assembly including post, snug, gage rod with clamp and fine adjust and thread adapter without case

Cat. No.	EDP	Description	Sale Price
659A	56687	Magnetic base, upright post assembly; Including post, snug, gage rod with clamp and fine adjust and thread adapter, without case	533.90
659BZ	55948	Base and upright post assembly with inch reading indicator 25-131J in case	794.20



659A

3670 DIAL INDICATOR STANDS**NEW!**

- Designed for comparison measurements using a dial indicator or digital indicator
- Vertical fine adjustment is standard on all models
- Rugged bracket hold indicator firmly in place
- Can be used with any AGD dial or digital indicator
- Furnished with a serrated or flat anvil which is ground and lapped and removable



* Indicator not included. 3671

Cat. No.	EDP	Description	Sale Price
3671	69901	Stand with round, flat anvil	498.75
3672	69902	Stand with round, serrated anvil	498.75
3673	69903	Stand with square, serrated anvil	498.75

770 ELECTRONIC BORE GAGES**NEW!**

- Larger and clearer LCD display
- Updated electronics
- Standard proximity output
- Simple two button operation
- 4 preset memories

IP67

770XTZ-200

Cat. No.	EDP	Range	Sale Price
770XTZ-200	72596	.160 - .200"	2,679.00
770XTZ-250	72597	.200 - .250"	2,679.00
770XTZ-312	72598	1/4 - 5/16"	1,848.70
770XTZ-375	72599	5/16 - 3/8"	1,855.35
770XTZ-500	72600	3/8 - 1/2"	1,828.75
770XTZ-625	72601	1/2 - 5/8"	1,849.65
770XTZ-750	72602	5/8 - 3/4"	1,896.20
770XTZ-1	72603	3/4 - 1"	2,220.15
770XTZ-138	72604	1 - 1-3/8"	2,622.00
770XTZ-2	72605	1 - 3/8-2"	2,590.65
770XTZ-258	72606	2 - 2-5/8"	2,955.45
770XTZ-314	72607	2-5/8 - 3-1/4"	2,879.45
770XTZ-4	72608	3-1/4 - 4"	3,201.50
770XTZ-5	72609	4 - 5"	3,334.50
770XTZ-6	72610	5 - 6"	3,444.70
770XTZ-7	72611	6 - 7"	3,756.30
770XTZ-9	72613	8 - 9"	4,847.85
770XTZ-10	72614	9 - 10"	5,341.85

781 ACCUBORE® ELECTRONIC BORE GAGES

- Single-hand operation with right and left hand viewing flexibility
- Large, easy-to-read digital display
- Enhanced wear life with carbide-faced contacts - available from 1/2" to 8"
- Convenient "Go/No Go" tolerance indicator lights
- Resolution: .00005"
- Accuracy: .00015"



781XTZ-160

Cat. No.	EDP	Range	Sale Price
781XTZ-160	68161	.120"-.250"	3,311.70
781XTZ-500	68166	3/8" -1/2"	2,468.10
781XTZ-625	68167	1/2"-5/8"	2,497.55
781XTZ-750	68168	5/8"-3/4"	2,626.75
781XTZ-1	68651	3/4"-1"	2,667.60
781XTZ-138	67685	1"-1-3/8"	3,019.10
781XTZ-2	67686	1-3/8"-2"	3,094.15
781XTZ-258	67687	2"-2-5/8"	3,160.65
781XTZ-314	67688	2-5/8"-3-1/4"	3,160.65
781XTZ-4	67689	3-1/4"-4"	3,355.40
781XTZ-5	67690	4"-5"	3,672.70
781XTZ-6	67691	5-6"	3,870.30
781XTZ-7	67692	6-7"	4,072.65
781XTP-4	68707	3/4"-4"	2,099.50

3089 DIAL BORE GAGES

- All anvils laser marked for easy selection
- Gage chart for quick and easy anvil selection
- Includes sturdy aluminum case with cut outs for gage and all accessories
- Ergonomic design with non-slip insulating grip
- Resolution: .00005"




3089Z-131-715J

Cat. No.	EDP	Range	Sale Price
3089Z-131-715J	12456	0.7"-1.5"	229.90
3089Z-131-26J	12458	2"-6"	256.50

13 DOUBLE SQUARES

With Hardened Blades

- With graduated blade only
- 4R graduation: Quick Reading, 8ths, 16ths, 32nds, 64ths
- With graduated blade only
- Level vial on base

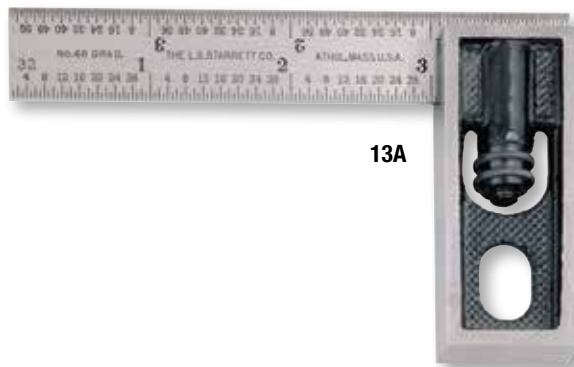

13A

Cat. No.	EDP	Size	Sale Price
13A	50109	4"	79.80

C359 PRECISION UNIVERSAL BEVEL VERNIER PROTRACTORS

- The protractor is one of the most valuable and useful tools for the kit of every good toolmaker, inspector or machinist
- Available with hardened 7" (175mm) or 12" (300mm) blades which can be rotated to the desired angle and adjusted to the desired length
- Both the dial and the blade can be locked independently
- An acute angle attachment is available



C359BZ

Cat. No.	EDP	Range	Grads.	Reading	Sale Price
C359BZ	51394	7"	5 min. or 1/12 degree	0-360°	566.20
C359DZ	51396	12"	5 min. or 1-1/12 degree	0-360°	593.75
C359FZ	51398	7" and 12"	5 min. or 1-1/12 degree	0-360°	637.45

435 COMBINATION SETS

- Reversible lock bolts, scriber, spirit level in both square head and protractor head
- Direct reading double 180° protractor scale
- Hardened steel, machine divided blade



C435-12-4R

Cat. No.	EDP	Range	Grad.	Blade Finish	Reading	Sale Price
C435-12-4R	66682	12"	4R	Satin Chrome	8ths, 16ths, Quick Reading 32nds, 64ths	234.65
435-12-16R	51557	12"	16R	Regular	Quick Reading 32nds, 64ths, Aircraft Quick Reading 50ths, 100ths	237.50
435-18-4R	51558	18"	4R	Regular	8ths, 16ths, Quick Reading 32nds, 64ths	261.25

SR160 SURFACE ROUGHNESS TESTER

- Bluetooth Technology - Quick, reliable communication between traverse and display/control unit
- Tactile measurement button great for challenging orientations
- Detailed graph of measurement area
- Charge and transfer data through PC connection, main charger and standard USB charger included
- Two-piece, breakaway construction for remote readings



NEW!



SR160

Cat. No.	EDP	Sale Price
SR160	72584	1,852.50



3805B ELECTRONIC DUROMETER

- Meets ASTM standards for durometer hardness
- Simple 3-button control
- Auto-hold feature
- Custom carrying case
- Resolution: 0.5H
- Deviation: <1% H
- Accurate and repetitive deviation -20~90 HSA

Cat. No.	EDP	Range	Sale Price
3805B	69882	0-100 HSA	228.00

**3805B****3810A DIGITAL PORTABLE HARDNESS TESTER**

- Combines fast test speeds coupled with ample memory and output
- Performs tests that easily convert to most popular hardness scales such as Rockwell, Brinell, Vickers and Shore
- Designed to test the hardness of large, hard metal parts
- USB output
- Automatic conversions to Rockwell Brinell, Vicker and Shore
- Automatic mean value as well as Min. and Max. values

Cat. No.	EDP	Sale Price
3810A	69871	2,164.10

**3810A****3811A COMPACT HARDNESS TESTER**

- Combines fast test speeds coupled with ample memory and output
- Performs tests that easily convert to most popular hardness scales such as Rockwell, Brinell, Vickers and Shore
- Designed to test the hardness of large, hard metal parts
- USB output
- Automatic conversions to Rockwell, Brinell, Vicker and Shore
- Automatic mean value as well as Min. and Max. values

Cat. No.	EDP	Sale Price
3811A	69881	1,826.85

**3811A****3812 ULTRASONIC THICKNESS GAGE**

- Menu-driven, multi-functional tester with basic measurement capabilities
- Measures the thickness of metallic and non-metallic materials such as aluminum, titanium, plastics, ceramics and glass
- Accurately display readings in inch or millimeter
- Ideal for measuring a wall thickness that would be difficult to gage with conventional hand tools

Cat. No.	EDP	Sale Price
3812	67668	1,149.50

**3812**

3814 ANALOG BENCH HARDNESS TESTER

- Ability to hand Rockwell Scales A through H and K
- Stable cast iron construction
- Ideal basic hardness testing for many typical applications
- Easy to use

Cat. No.	EDP	Sale Price
3814	67754	2,733.15



73 "YANKEE" CALIPERS AND DIVIDERS

- Starrett "Yankee" calipers and dividers are made from a high steel and well finished
- The bow spring, although flexible, is exceedingly strong to assure reliability
- All sizes are available with either spring or solid nut
- The Starrett quick-adjusting automatic-closing spring nut is designed for making fast, positive adjustments

Cat. No.	EDP	Range in	mm	Sale Price
73B-6	50337	6	150	55.10
73B-8	50339	8	200	77.90
73B-12	50343	12	300	80.75



79 "YANKEE" SPRING-TYPE CALIPERS

- Made from a high steel and well finished
- The bow spring, although flexible, is exceedingly strong to assure reliability
- All sizes are available with either spring nut or solid nut
- The quick-adjusting, automatic-closing spring nut is designed for making fast, positive adjustments


Cat. No.	EDP	Range in	mm	Sale Price
79B-6	50367	6	150	53.20



270 TAPER GAGE

- Very useful tool for bearing work and gaging slots
- Made of quality tool steel and accurately tapered throughout entire length for quick and convenient measuring
- 7/16" wide x 6-1/4" long (11mm x 160mm)
- Can be used as a precision shim
- One side graduated from .010" to .150" in thousandths of an inch; the reverse side from 0.3mm to 4mm in one-twentieth of a mm (0.05mm)


Cat. No.	EDP	Description	Sale Price
270	51292	English/Metric	112.10

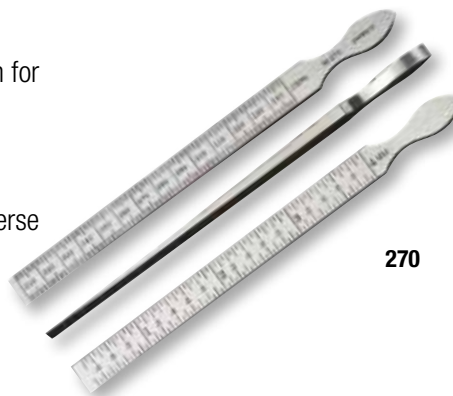

66 THICKNESS GAGE

- Tempered-steel, carefully finished to correct thickness
- Individually tested and marked with thickness
- Leaves easily removed or replaced
- Rugged, substantial steel case protects leaves
- Straight leaves
- Leaves made of finest tempered-steel
- Locking device

Cat. No.	EDP	Leaves	Range	Sale Price
66	50314	26 Straight, English	.0015 - .025"	59.85
66T	50315	26 Tapered, English	.0015 - .025"	66.50

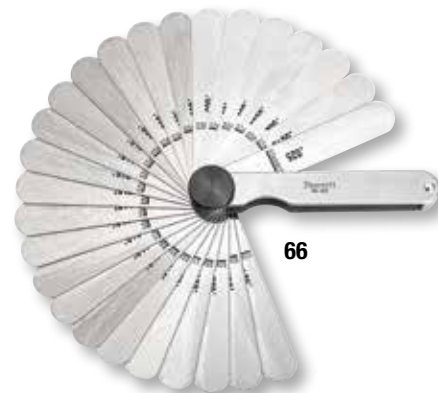

66

245 ENGINEERS' COMBINATION TAPER, WIRE AND THICKNESS GAGE

- Compact steel case
- Locking device to lock any leaf or leaves in position
- English Standard wire gage, sizes numbered from 19-36 (.042-.004"), plus two additional sizes, 1-16" and 1/8"
- The reverse side has decimal equivalents in thousandths
- Has eleven thickness or feeler leaves

Cat. No.	EDP	Description	Sale Price
245	51170	With taper gage, English standard wire gage and 9" reading thickness gage leaves	154.85
245M	51171	With taper gage, English standard wire gage and 11mm reading thickness gage leaves	177.65



245

474 SCREW PITCH GAGE

- Consists of a substantial steel case with a number of folding leaves at both ends, each leaf having teeth corresponding to a definite pitch, marked on each leaf
- Features a locking device at both ends of the case, so leaves can be securely locked in position for use
- Leaves have a special narrow design, permitting checking internal threads in nuts, etc., as well as external threads

Cat. No.	EDP	Description	Sale Price
474	52486	With locking device and 11-1/2 and 27 pipe thread pitches	40.38



474

666 THICKNESS "FEELER STOCK" IN ROLLS

- In a compact, sturdy plastic rewindable dispenser case. This case handles stock up to .015" and 0.35mm only.
- Roll stock in thickness of .016" or 0.40mm and over is furnished in 20' or 6m (non-dispensable) rolls in cardboard box
- Housed in convenient, rewindable dispenser rolls
- Handy 25' and 7.6m rolls 1/2" and 12.7mm wide



666-1

Cat. No.	EDP	Thickness	Sale Price
666-1/2	64210	.005"	235.60
666-1	52796	.001"	99.75
666-1 1/2	52797	.0015"	51.30

806 THICKNESS GAGE HOLDERS

- Stock up to 6" (150mm) is inserted in the holder and gripped in the desired position by a cam lock
- Can be snapped off and new stock pulled out until used up
- Dull nickel finish
- 806D Clamps have contrasting finish to eliminate the possible confusion on which end holds the thicker or thinner stock



806

Cat. No.	EDP	Description	Gages	Sale Price
806	53039	Single holder	26	28.50
806D	53040	Double holder	26	31.83

18 AUTOMATIC CENTER PUNCHES

- Strong and well-proportioned
- Tempered gripping surfaces firmly hold square or round shanks
- Plunger operated by knurled sleeve
- Spring inside sleeve causes plunger to back off when pressure is removed
- Round shanks can be gripped, but care must be used. Excessive pressure may break the movable V-jaw.



18C

Cat. No.	EDP	Body Length	Diameter	Sale Price
18C	56757	5 1/4" (130mm)	11/16" (17mm)	47.50

129 BENCH BLOCK

- The block is made from steel and is hardened and ground. A V-groove across the face accommodates round and odd-shaped stock.
- The smooth finish helps preserve the finish of the work being held
- The knurled side provides a good gripping surface, making it easier to handle
- The base is recessed to make it lighter, yet sufficiently strong to withstand hard usage
- 3" diameter



129

Cat. No.	EDP	Sale Price
129	50559	96.90

162 PIN VISES

- The handles of these pin vises are reduced in size so that they can be rapidly rotated between thumb and finger when filing small work
- Special tapered collet, providing maximum clamping surface
- Smaller body diameter than the chuck to allow fast opening and closing and rapid rotation when used on small work
- Available individually or as a complete set in a convenient case



162A

Cat. No.	EDP	Range in	mm	Sale Price
162A	50599	0-.040	0-1	17.58
162B	50600	.030-.062	0.8-1.6	17.58
162C	50601	.050-.125	1.3-3.2	19.00
162D	50602	.115-.187	2.9-4.8	20.43

187 JOBBERS' DRILL GAGE

- Quick sizing of any twist drill from 1/16"-1/2" by 64ths
- 29 holes marked with drill size inches and decimal equivalents
- Rigidly tested after hardening
- Black matte finish with gage information steel stamped on one side and white marked on reverse side for quick, clear reading



187

Cat. No.	EDP	Sale Price
187	50677	63.65

130 BENCH LEVEL

- A very handy, compact bench level
- With sensitive and accurate single vial
- The body is made of seasoned cast iron with black wrinkle finish and an accuracy machined base leveling



130

Cat. No.	EDP	Length	Sale Price
130	50560	3-3/8"	36.58

PROMO 2016.1

Starrett®

THE L.S. STARRETT COMPANY - CORPORATE HEADQUARTERS

Phone: (978) 249-3551 | Fax: (978) 249-8495
121 Crescent Street - Athol, MA 01331 - USA